


DATASHEET MC-CARTRIDGE

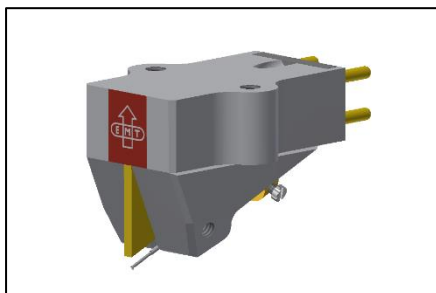

JSD 5

JSD 6

High-End stereo cartridge with aluminium-body

| Specification | JSD 5 | JSD 6 |
|------------------------------|--------------------------------|--------------------------------|
| Diamond: | MR HP | SFL HP |
| Cantilever: | Boron | |
| Transducer: | MC Stereo | |
| Magnet: | AlNiCo, gold-plated | |
| Body: | Aluminium | |
| Connection: | 1/2" - 4pin | |
| Vertical Tracking Angle: | 23° | |
| Weight: | 10g | |
| Tracking force: | 2,4g | |
| Output voltage: | 1.05mV @ 5cm/s | |
| Compliance: | 12µm/mN | |
| Frequency response: ±2dB: | 20 - 30'000Hz 40 - 12'500Hz | 20 - 25'000Hz 40 - 12'500Hz |
| Impedance: | 2x 24Ω | |
| Recommended load: | 200 - 300Ω | |
| Nomenclature | | |
| JSD: | Jubilee Stereo Diamond | |
| 5 / 6: | Stylus tip radius in microns | |
| MR: | Multi Radius diamond shape | |
| SFL: | Super Fine Line diamond shape | |
| HP: | High polish grade | |